

Data Sheet

Article No. 3659



- 19" sub rack Kit for Backplane, Heavy
- Installed load up to 15 kg
- Shock and vibration resistance up to 5 g
- Tested to the BN 411002, BN 411003


1. Environmental conditions

Parameter	Min.	Typ.	Max.	unit
Temperature	-40		+85	°C
Humidity	10		90 ¹	%RH
Protection class back		IP20		

2. Dimension / weight sub rack

Designation				unit
Dimensions WxHxD	84HP	3HE	9.25 in	
Weight (with cable)		1.28		kg

3. sdxCable specification

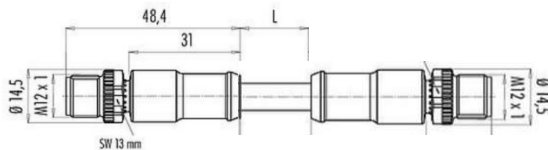

L=0.32m

Side A

Side B

X1 CAN 1 Schirm 2 rot (AWG22) 3 schwarz (AWG22) 4 weiß (AWG24) 5 blau (AWG24)	M12 male A-coded 1 CAN_SHLD 2 3 4 CAN H 5 CAN L
X2 CAN 1 Schirm 2 rot (AWG22) 3 schwarz (AWG22) 4 weiß (AWG24) 5 blau (AWG24)	M12 male A-coded 1 CAN_SHLD 2 3 4 CAN H 5 CAN L

4. asisBGT Kit includes

- 1 pce 19" Subrack Kit for Backplane, Heavy
- 16 pcs M2.5x12 Mounting screws for asisVS-100, asisJRU
- 1 pce sdxCAN connection cable 0.3m

5. Standards and Approvals

EN 50155:2022-06

EN 45545-2:2020-10

created 2025-10-22/RB	checked 2025-10-22/CH	approved 2025-10-22/RB	filename asisBGT_Datasheet.docx	version 1.1	page 1/1
--------------------------	--------------------------	---------------------------	------------------------------------	----------------	-------------